



External Doors Online

Tel : 01484 613104 Email : sales@externaldoorsonline.co.uk



Increase the flow of natural light through your home

## Fixed Flat Rooflight



**QUICK DELIVERY ON  
STANDARD STOCK SIZES**

1000mm x 1000mm  
1000mm x 1500mm  
1000mm x 2000mm  
1000mm x 2500mm


**Quick & Easy Installation**

- ✓ U-Value 1.2 w/m<sup>2</sup> – Double Glazed
- ✓ Quick and easy installation
- ✓ Glazed into an Anthracite Grey (RAL 7016) Aluminium Frame with thermal break

- ✓ U-Value 0.7 w/m<sup>2</sup> – Triple Glazed
- ✓ Toughened safety glass as standard
- ✓ Manufactured with a decorative border as standard

**Also available in bespoke sizes**

# Standard Stock Sizes Uprand Dimensions

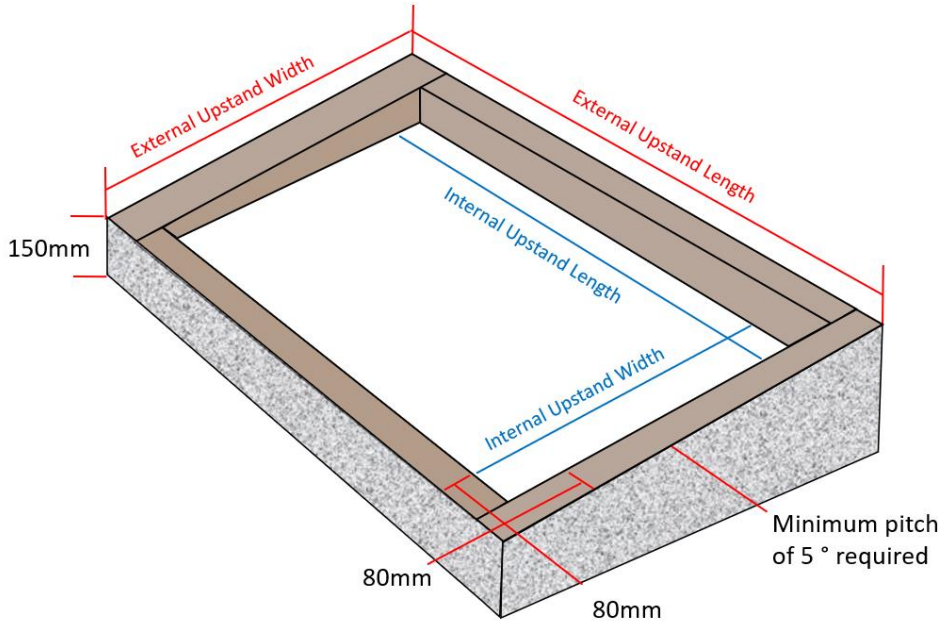

## 1000mm x 1000mm Internal Opening Size

Internal Upstand Size Width 1000mm  
Internal Upstand Length 1000mm

External Upstand Size Width 1160mm  
External Upstand Length 1160mm

## 1000mm x 1500mm Internal Opening Size

Internal Upstand Size Width 1000mm  
Internal Upstand Length 1500mm

External Upstand Size Width 1160mm  
External Upstand Length 1660mm

## 1000mm x 2000mm Internal Opening Size

Internal Upstand Size Width 1000mm  
Internal Upstand Length 2000mm

External Upstand Size Width 1160mm  
External Upstand Length 2160mm


## 1000mm x 2500mm Internal Opening Size

Internal Upstand Size Width 1000mm  
Internal Upstand Length 2500mm


External Upstand Size Width 1160mm  
External Upstand Length 2660mm

## Installation Guide


1. Apply thick layer of silicone around top of upstand

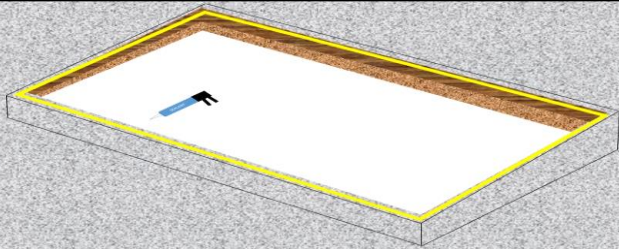

2. Position and lower rooflight frame over the upstand

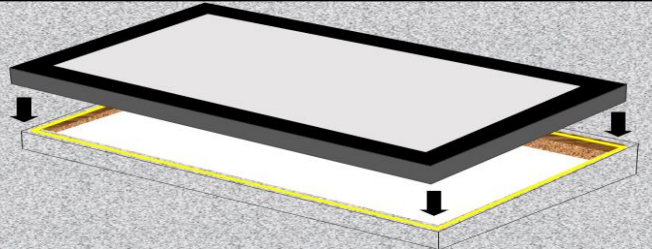

3. Pre drill fixing holes through frame and upstand

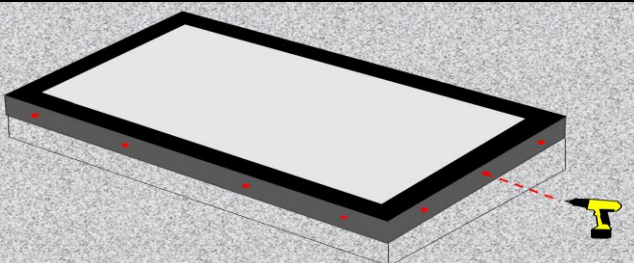

4. Secure with fixing screws

