



External Doors Online

Tel : 01484 613104 Email : sales@externaldoorsonline.co.uk



Flat Rooflight

Contemporary High
Quality **Light Solution**



Increase the
flow of natural
light through
your home



KEY FEATURES

- U-Value 1.2 w/m² – Double Glazed
- U-Value 0.7 w/m² – Triple Glazed
- Glazed into an Anthracite Grey (RAL 7016) aluminium frame with thermal break
- Available in both standard and bespoke sizes
- Quick and easy installation
- Manufactured with a decorative border as standard
- Available in a range of glass finishes
- Toughened Safety Glass as standard

PRODUCT INFORMATION

Our framed Rooflights help increase the flow of natural light into indoor spaces, whilst being low-maintenance with excellent thermal insulation and light transmission.

The glass that we use in our rooflights is an energy efficient glass which is designed to prevent heat escaping out through your rooflight to the cold outdoors.






ALUMINIUM FRAME

The Aluminium Frame features a thermal break in the frame which creates an insulated barrier and minimises the transfer of heat and cold through the frame reducing condensation and improving energy efficiency.

Thermal Broken Aluminium Flat Rooflight Profile

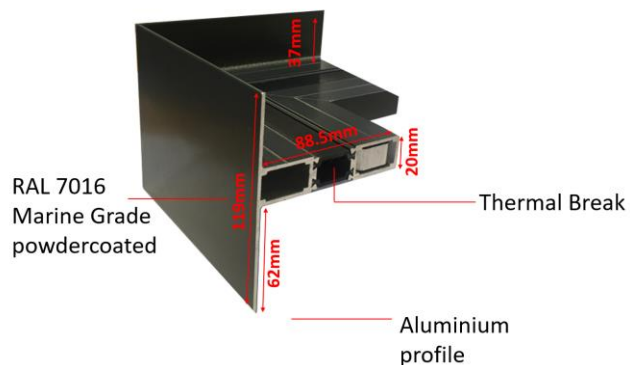

GLASS SPECIFICATION

Our Double Glazed glass have a centre pane U-value of 1.2 and our Triple Glazed glass have a U-value of 0.7 which is 30% better than rooflights with standard double glazing and enhanced sound reduction.


All units are Argon gas filled and have Thermal Super Spacer technology as standard.

The outer panel can be supplied in either clear, solar or privacy glass to suit your needs.

Manufactured Standards

BS EN-12150

BS EN-1279

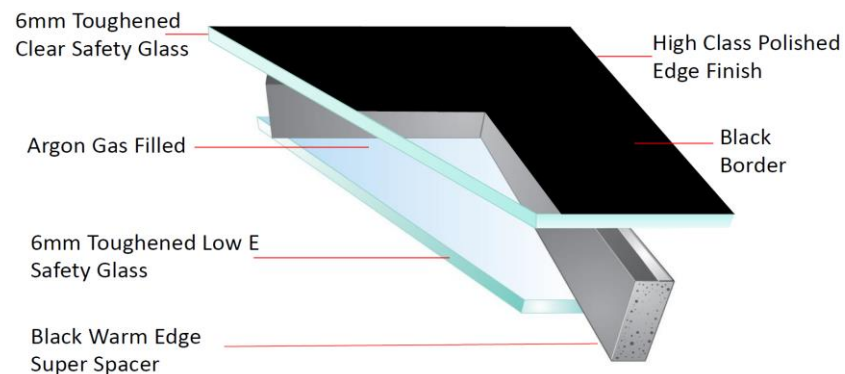



External Doors Online

Tel : 01484 613104 Email : sales@externaldoorsonline.co.uk